



HEARTH PRODUCTS



Designed to heat. Built to Last.

For over 25 years, unsurpassed quality and craftsmanship have made us an industry leader in innovative heating systems. Design, functionality, and efficiency merge to create exceptional products that will exceed all expectations. Whether time-honored traditional or bold and modern, our dynamic range of products will compliment any home décor. With a complete line of fireplace inserts, and freestanding stoves, we have the perfect solution for your heating requirements. We won't just meet your expectations; we'll exceed them...

Designed to heat. Built to last.





THE CABELLO

The Cabello is the newest edition to our line-up of wood burning fireplace inserts. Like the Boston, The exterior of the Cabello is made from traditional cast iron, detailed with reliefs and curves designed by our craftsmen. Unique to the Cabello, it's flush face design allows it to protrude a mere two inches from your existing masonry.

Design Features

- Flush Face Design
- Cast Iron Exterior
- Chrome Plated Latch with Wooden Handle
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Oversize Surround

Insert Details

| Model | 1200 | 1700 | | | |
|------------------------|-----------------------|-----------------------|-------|--|--|
| Maximum BTU's | 67,000 BTU | 74,000 BTU | | | |
| Heating Area | 2,200 ft ² | 3,000 ft ² | | | |
| Efficiency | 82.6% | 84.7% | | | |
| Burn Times | 6-10 Hours | 8-12 Hours | | | |
| Maximum Log Size | 18 in | 20 in | | | |
| | HEIGHT | WIDTH | DEPTH | | |
| Min. 1200 Install Dims | 191⁄4″ | 32" | 18½" | | |
| Min. 1700 Install Dims | 19¼″ | 32" | 22¾" | | |
| | | | | | |



Flush Cast Iron Design



150 CFM Adjustable Fan Control



Chrome Plated Latch with Wooden Handle

_







Exclusive Performance Features of all Enviro Wood Inserts

- Large firebox capacity for long overnight burns.
- Single, easy-to-use air control adjusts the heat output and regulates the fire.
- Twin pilot injection ports tuned to deliver fast start-up. These injection ports are 3" above the firebox floor so you can build a good deep ember bed and not affect low burn or start up.
- Ultra strong air wash helps to keep the glass clean
- High efficiency 150 cfm variable speed fan with override switch for convection heat.
- Radiant heat is maximized through the large glass area (177 in²)

Enviro Insert Features

- Clean Burning EPA tested as low as 3.3 g/hr.
- Enviro gives you an limited lifetime warranty on the firebox baffle.*
- Our Ultra Strong Air wash keeps the glass clean longer, giving you an unobstructed view of the big, bright, beautiful fire.
- Radiant heat is like sunshine. With the largest glass door, Enviro's are the best radiant heaters.
- The convection fan moves the heat further into your home.

* See owners manual for details.



THE BOSTON

Making it's debut in the beginning of 2011 the successful Boston series combines a beautiful cast iron exterior with the raw power of an Enviro wood burning firebox. The tested design and build quality of the Boston Fireplace Insert strikes a perfect balance of functionality and aesthetic feel.

Design Features

- Cast Iron Exterior
- Chrome Plated Latch with Wooden Handle
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Oversize Surround
- Painted Black Finish

Insert Details

| Model | 1200 | 1700 | | | |
|------------------------|-----------------------|-----------------------|-------|--|--|
| Maximum BTU's | 67,000 BTU | 74,000 BTU | | | |
| Heating Area | 2,200 ft ² | 3,000 ft ² | | | |
| Efficiency | 82.6% | 84.7% | | | |
| Burn Times | 6-10 Hours | 8-12 Hours | | | |
| Maximum Log Size | 18 in 20 in | | | | |
| | HEIGHT | WIDTH | DEPTH | | |
| Min. 1200 Install Dims | 19¼" | 27" | 14" | | |
| Min. 1700 Install Dims | 19¼" | 27" | 18½" | | |
| | | | | | |



Chrome Plated Latch with Wooden Handle



150 CFM Adjustable Fan Control



Intricate Cast Iron Detailing



THE VENICE

The modern design of the Venice fireplace insert lends itself to a wide variety of different room decors. The same reliable heating power of our Kodiak Fireplace Insert with a contemporary twist.

Design Features

- Modern Exterior
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Wooden Handle
- Optional Oversize Surround
- Formed Steel Surround

Insert Details

| Model | 1200 | 1700 | | |
|------------------------|-----------------------|-----------------------|-------|--|
| Maximum BTU's | 67,000 BTI | 74,000 BTU | | |
| Heating Area | 2,200 ft ² | 3,000 ft ² | | |
| Efficiency | 82.6% | 84.7% | | |
| Burn Times | 6-10 Hour | 8-12 Hours | | |
| Maximum Log Size | 18 in 20 in | | | |
| | HEIGHT | WIDTH | DEPTH | |
| Min. 1200 Install Dims | 19¼" 27" | | 14" | |
| Min. 1700 Install Dims | 19¼" 27" | | 18½" | |
| | | | | |



Formed Steel Surround



Wooden Handle



8

Modern Design



THE KODIAK


The Kodiak was our first wood insert fireplace and since that time, has consistently been a popular choice among wood insert customers. Powerful yet simple, the Kodiak lends itself perfectly to cottages and dens alike. Optionally it has five different door configurations, painted, nickel, gold, and painted with nickel or gold trim.

Design Features


- Our Original Wood Insert
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Oversize Surround
- Choice of Door FinishPainted Black
- Nickle
- Nickle Trim over Painted Black
- Gold
- Gold Trim over Painted Black

Insert Details

| Model | 1200 | 1700 | | | |
|------------------------|-----------------------|-----------------------|-------|--|--|
| Maximum BTU's | 67,000 BTU | 74,000 BTU | | | |
| Heating Area | 2,200 ft ² | 3,000 ft ² | | | |
| Efficiency | 82.6% | 84.7% | | | |
| Burn Times | 6-10 Hours | 8-12 Hours | | | |
| Maximum Log Size | 18 in | 20 in | | | |
| | HEIGHT | WIDTH | DEPTH | | |
| Min. 1200 Install Dims | 19¼" | 27" | 14" | | |
| Min. 1700 Install Dims | 19¼" | 27" | 18½" | | |
| · | | | | | |



Variety of Door Options



Baffles and Secondary Air Tubes



150 CFM Adjustable Fan Control










| Peri | forn | nar | nce |
|------|------|-----|-----|
| | | | |

| Performance | CABI 1200 | ELLO 1700 | BOSTON 1200 1700 | | VENICE 1200 1700 | | KOD 1200 | DIAK 1700 |
|----------------------|----------------------|----------------------|----------------------------|----------------------|-------------------------|----------------------|----------------------|----------------------|
| Maximum BTU's* | 67,000 BTU's | 74,000 BTU's | 67,000 BTU's | 74,000 BTU's | 67,000 BTU's | 74,000 BTU's | 67,000 BTU's | 74,000 BTU's |
| Heating Area * | 2200 ft ² | 3000 ft ² | 2200 ft ² | 3000 ft ² | 2200 ft ² | 3000 ft ² | 2200 ft ² | 3000 ft ² |
| Burn Times * | 6-10 hrs | 8-12 hrs | 6-10 hrs | 8-12 hrs | 6-10 hrs | 8-12 hours | 6-10 hrs | 8-12 hrs |
| Maximum Log Size | 18" | 20" | 18" | 20" | 18" | 20" | 18" | 20" |
| Efficiency* | 82.6% | 84.7% | 82.6% | 84.7% | 82.6% | 84.7% | 82.6% | 84.7% |
| EPA Tested Emissions | 3.3 g/hr. | 4.5 g/hr. | 3.3 g/hr. | 4.5 g/hr. | 3.3 g/hr. | 4.5 g/hr. | 3.3 g/hr. | 4.5 g/hr. |
| Weight | 400 lbs. | 455 lbs. | 425 lbs. | 480 lbs. | 335 lbs. | 390 lbs. | 335 lbs. | 390 lbs. |
| Firebox Capacity | 1.85 ft ³ | 2.50 ft ³ | 1.85 ft ³ | 2.50 ft ³ | 1.85 ft ³ | 2.50 ft ³ | 1.85 ft ³ | 2.50 ft ³ |
| 6" Flue Diameter | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| Mobile Home Approved | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| | | | | | | | | |

| Minimum | Clearances |
|---------|------------|

150 CFM Fan

| Minimum Clearances | 1200 | 1700 |
|--|---------------|---------------|
| A - side of unit to side wall | 14" | 14" |
| B - top of unit to bottom of 8" mantle | 21" | 24" |
| C - top of unit to max. ¾" combustible facing | 171⁄2″ | 19½″ |
| D - side of unit to side facing (3/4 protrusion) | 1" | 1" |
| E - front of door to edge of floor protection | 16" (18" CDN) | 16" (18" CDN) |
| F - side of unit to side facing | 6" (8" CDN) | 6" (8" CDN) |



(specs and clearances are approx. only - see technical manual for exact figures)

Approved for sale in Canada and the United States.

| Installation | CABELLO MASONRY ZERO CLEARANCE | | BOSTON MASONRY ZERO CLEARANCE | | | VENICE & KODIAK MASONRY ZERO CLEARANCE | | | | | | |
|--|--------------------------------|---------|--------------------------------|---------|---------|---|---------|---------|---------|---------|---------|---------|
| Firebox Variation | 1200 | 1700 | 1200 | 1700 | 1200 | 1700 | 1200 | 1700 | 1200 | 1700 | 1200 | 1700 |
| Minimum depth | 18" | 22 ½" | 18 ½" | 23" | 14 ½" | 19" | 15" | 19 ½" | 13 ½" | 18" | 14" | 18 ½" |
| Minimum width at back of fireplace | 22 3/8" | 22 3/8" | 23" | 23" | 22 3/8" | 22 3/8" | 23" | 23" | 22 3/8" | 22 3/8" | 23" | 23" |
| Minimum width at front of fireplace | 32" | 32" | 32 1/4" | 32 1/4" | 32" | 32" | 32 1/4" | 32 1/4" | 27" | 27" | 27 1⁄4" | 27 1⁄4″ |
| Minimum width at front of fireplace to include shroud when surround is in the forward position | N/A | N/A | 32 1/4" | 32 1/4" | N/A | N/A | 32 1/4" | 32 1/4" | 33 ¾" | 33 ¾" | 34" | 34" |
| Minimum height | 19 1/4" | 19 1⁄4" | 20" | 20" | 19 1⁄4″ | 19 1⁄4″ | 20" | 20" | 19 1/4" | 19 1⁄4" | 20" | 20" |

"Progressive Burn Technology"


LONG BURN TIMES -

Progressive Burn Technology is designed to keep hot embers in the firebox after a nights burning. This process is achieved by restricting the air in the back of the firebox, leaving hot embers for you to start up your insert again.

CLEAN BURNING -

Our secondary air tubes add super-heated air to the fire as the burn progresses to the front. This maintains efficiencies and keeps emissions low.



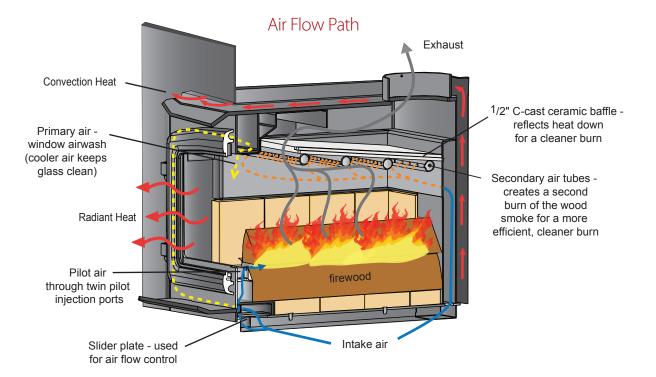


^{*} Figures will vary considerably with floor plan, house layout and heat loss of house. Due to on-going product development, product appearances and specifications are subject to change without notice. Efficiency and area heated will vary according to location and fuel


^{**} See dealer for details. Certain models may not be available in your area or may require longer lead times for delivery.


Unit Dimensions

Unit Dimensions


CABELLO FLUSH-FACE INSERT










BOSTON TRADITIONAL

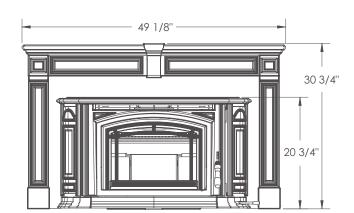







VENICE MODERN

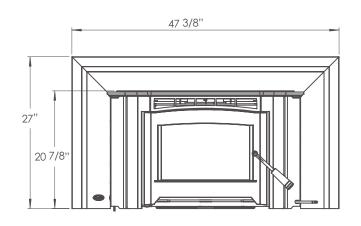








KODIAK

CLASSIC

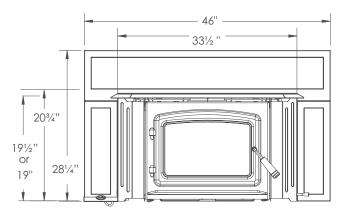

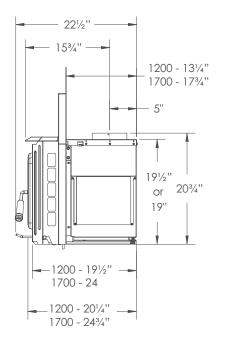





Learn more about our products at

enviro.com

- Detailed Product lineup
- Model Photo Galleries
- Downloadable Manual PDF's
- Unit Comparison Charts
- Youtube Burn Example Videos
- Online Brochures
- Dealer Locator Tool



