


# C44

LINEAR GAS FIREPLACE



[enviro.com](http://enviro.com)

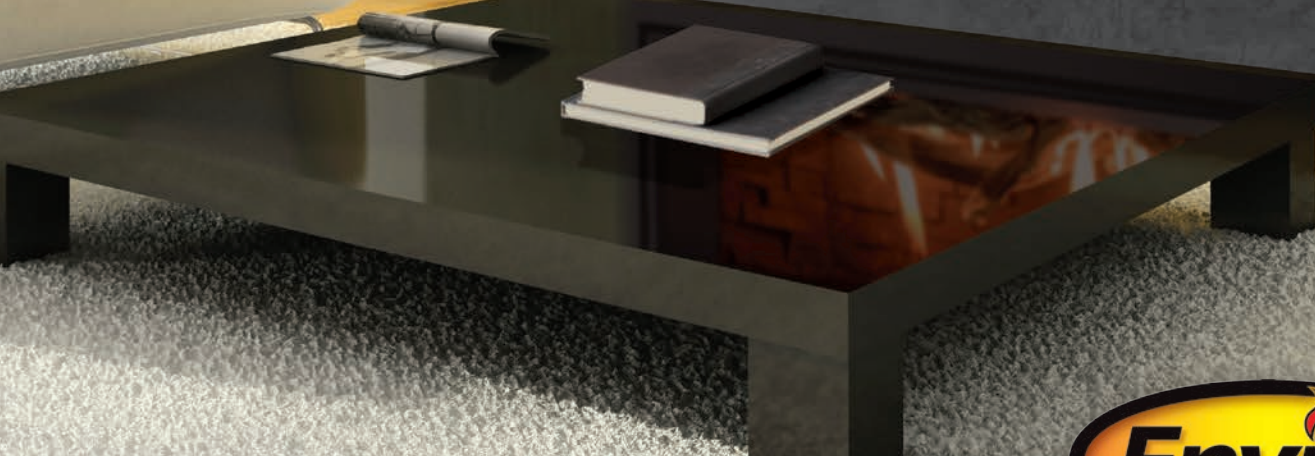



*Ledgestone Liner – Ultra High Definition Log Set*



*Fluted Liner – Ultra High Definition Log Set*



*Porcelain Enameled Liner – Ultra High Definition Log Set*



*Porcelain Enameled Liner – Rock and Log Combination*





*Porcelain Enameled Liner, Full Tray of Clear Glass Beads, Halogen Lighting Kit, Powder Coated Surround*



*Ledgestone Liner – Glass Bezel*



*Fluted Liner – Glass Bezel*



*Porcelain Enameled Liner – Glass Bezel*





*Ledgestone Liner – Full Glass Tray*



*Fluted Liner – Full Glass Tray*



*Porcelain Enameled Liner – Full Glass Tray*




*Porcelain Enameled Liner, Ultra High Definition Log Set*



## Choice of Flame Accent

Choose from a full tray of black glass beads, black glass beads with a glass bezel, or clear glass beads with halogen lighting kit. Add the optional ultra high definition log set or a rock & log combination for a classic touch.



## Choice of Liner

The C44 blends in with a variety of decor with a choice of either charcoal fluted liner, ledgerstone liner or porcelain enameled liner.



## Hidden Pilot System

The C44 uses a hidden pilot system diagonally recessed on a far edge so as not to obstruct the overall look of the burn.



## Optional Lighting Kit

A Halogen lighting kit installs beneath a bed of clear glass beads to create dynamic lighting effects in the C44's firebox.



## Optional Surround

Create stronger focus on the flames by adding a powder coated or brushed nickel modern surround to the C44.

## Specifications

BTU Maximum Input - NG / LP	38,000 BTU's
-----------------------------	--------------

BTU Minimum Output* - NG / LP	12,255 BTU's
-------------------------------	--------------

Turn Down - Valve 820 / Valve 885	Up to 50%
-----------------------------------	-----------

FE Efficiency **	64.5%
------------------	-------

Valve Configuration	Standing Pilot & IPI
---------------------	----------------------

Venting	5" / 8"
---------	---------

Glass Size - 504 in <sup>2</sup>	HEIGHT	WIDTH
	12"	42"

Visible Dimensions	16¼"	46¼"
--------------------	------	------

Minimum Framing Dimensions †	HEIGHT	WIDTH	DEPTH
	65"	55"	20"

\* Calculated by 38,000 (Max BTU Input) × 50% (Turn Down Valve) × 64.5% (FE Efficiency)

\*\* Efficiency, emissions and area heated varies by venting & location. Tested to P4.1-15

† Please refer to owners manual for detailed installation instructions.



## Optional Heat Distribution Kit

This heat distribution kit channels hot air away from wall mounted TV's or other valuable materials placed directly above the unit.



## Optional Dual Blower Kit

This optional 220 CFM fan assembly operates with a left and right fan to help evenly push warm air further into the room.

