

# CALLAWAY 72, CALLAWAY 50, CALLAWAY 40 & CALLAWAY SEE-THRU

DIRECT VENT GAS FIREPLACES



Callaway 72 shown with a Komfort Zone Kit, 1-piece surround, birch log set, black glass panels, reflective midnight crushed glass burner media, and black sand perimeter.

QUALITY FIREPLACES FOR LIFE.

**KOZY**  **HEAT**  
FIREPLACES

Callaway See-Thru shown with an outdoor kit, a Komfort Zone Kit, a 1-piece rectangle surround, log set, black glass panels, lava rock burner media and black sand perimeter.



# CALLAWAY SERIES

## Decorative Surrounds

Sizes shown below: Callaway 72 / Callaway See-Thru / Callaway 50 / Callaway 40

74-3/8" / 52-3/8" / 52-3/8" / 42-3/8"

17-1/8" /  
15-1/2" /  
15-1/2" /  
15-1/2"



**No Surround**  
*Screen Only*

76-5/8" / 54-5/8" / 54-5/8" / 44-5/8"

19-5/8" /  
18" /  
18" /  
18"



**Rectangle Surround (1 Piece)**  
*Available in Black*

80-1/4" / 58-1/4" / 58-1/4" / 48-1/4"

23-3/8" /  
21-13/16" /  
21-13/16" /  
21-3/4"



**Rectangle Surround (4 Piece)**  
*Black*

80-1/4" / 58-1/4" / 58-1/4" / 48-1/4"

23-3/8" /  
21-13/16" /  
21-13/16" /  
21-3/4"



**Rectangle Surround (4 Piece)**  
*Stainless Steel*



Callaway See-Thru shown with an outdoor kit, a log set, black glass panels, lava rock burner media, and black sand perimeter.

87" / 65" / 65" / 55"

22-7/8" /  
21-1/4" /  
21-1/4" /  
21-1/4"



**Gallery Surround**  
*Black*

81-3/16" / 59-3/16" / 59-3/16" / 49-3/16"

24-1/2" /  
22-9/16" /  
22-9/16" /  
22-7/8"



**Mission Screen Front**  
*Vintage Bronze*

## Burn Videos



Callaway 72  
Rock Accent Kit



Callaway  
See-Thru



Callaway 50  
Rock Accent Kit



Callaway 40  
Birch Log



Callaway 72  
Birch Log



Callaway 50  
Traditional Log Kit



Callaway 72  
Beach Accent Kit



Callaway 50  
Beach Accent Kit



The Callaway 40 shown with a 4-piece rectangle surround in black, birch log set, a Chicago brick refractory, amber crushed glass burner media, and lava rock perimeter

## CALLAWAY SERIES

### Media & Refractory Options



Rock accent media kit with black glass panels, reflective midnight crushed glass burner media, and a black sand perimeter



Beach accent kit with legestone refractory, lava rock media, and a vermiculite perimeter



Traditional log set with Chicago brick Refractory, reflective copper crushed glass burner media, and a lava rock perimeter



Traditional log set with black reflective glass panels, reflective midnight crushed glass burner media, and black glass perimeter



Birch log set with a black reflective glass panels, reflective midnight crushed glass burner media, and black sand perimeter

### Burner & Optional Perimeter Media



Reflective Midnight Crushed Glass Burner & Perimeter Media



Reflective Copper Crushed Glass Burner & Perimeter Media



Lava Rock Burner & Perimeter Media



Vermiculite Perimeter Media



Black Sand Perimeter Media



Black Glass Panel Perimeter Media


Callaway 50 shown with a mission screen front in vintage bronze, beach accent, beach accent kit, ledgerstone refractory, lava rock burner media, and a vermiculite perimeter




## Outdoor Covered Fireplace Install

- Available only in Callaway 40, 50, & 72
- Fireplace operation is approved from 40 degrees F to 110 degrees F

- All wiring connections shall be in accordance with outdoor requirements of NECA NFPA 70
  - All clearances and requirements in your appliance manual must be adhered to
- \*Outdoor kit required for exterior installations – sold separately*

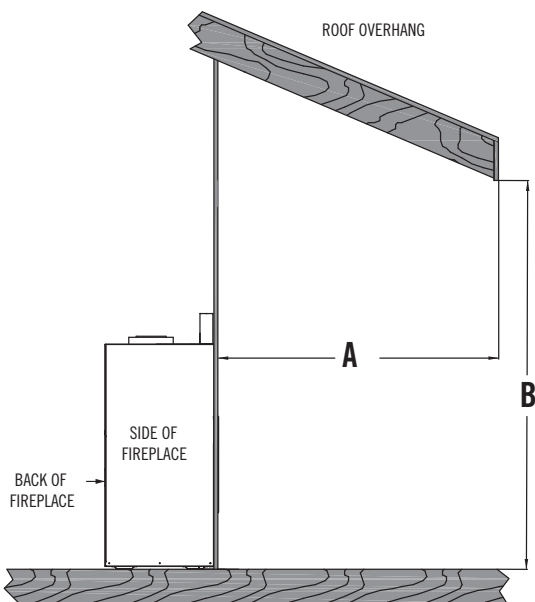

The overhang (A) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

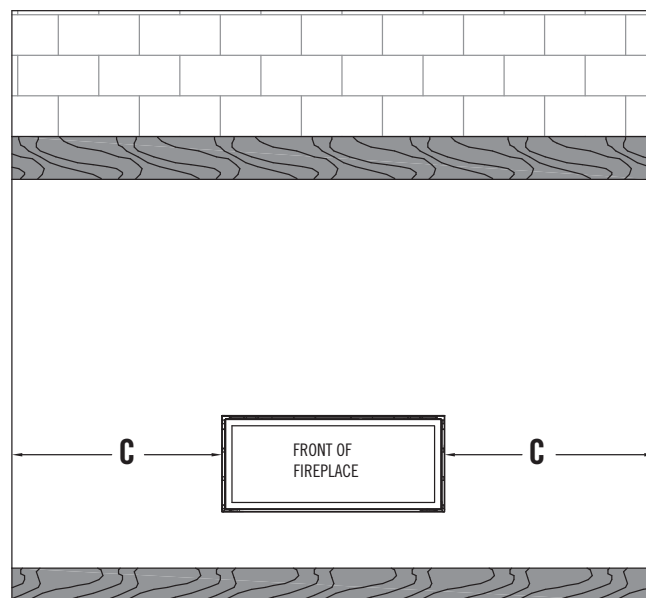

The width of the overhang to each side of the appliance (C) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

**EXAMPLE:** If roofline (B) is 10 ft. above the base of the fireplace, the overhang (A) must be 5 ft. or greater. The width of the overhang to EACH side of the fireplace (C) must be 5 ft. or greater.

# CALLAWAY SERIES

## Specifications

Model	Callaway 40	Callaway 50	Callaway See-Thru	Callaway 72
Height	39-1/4"	39"	39-1/8"	40-3/4"
Width	49-1/2"	59-1/2"	59-1/2"	81-1/2"
Depth	22"	22"	17"	22"
Weight	280 lbs	293 lbs	335 lbs	410 lbs
Viewing Area	40" x 13"	49-7/8" x 13-3/8"	49-7/8" x 13-3/8"	72-7/8" x 15-3/4"
BTU NG High / Low	31,500 / 16,500	35,500 / 18,500	35,500 / 18,500	49,500 / 25,000
BTU LP High / Low	31,500 / 16,500	35,000 / 18,000	35,000 / 18,000	49,000 / 24,500
ENERGUIDE P.4 NG/LP	71.32% / 71.44%	73.49% / 72.74%	72.52% / 73.73%	73.77% / 73.57%
Steady State NG/LP	72.70% / 72.78%	72.59% / 70.49%	73.54% / 74.21%	75.91% / 75.92%
AFUE%: NG/LP	72.85% / 73.12%	66.50% / 63.97%	73.92% / 75.33%	74.77% / 74.66%
Valve System	IPI	IPI / Millivolt	IPI	IPI
Optional Media Options	Traditional Logs, Beach Accent Kit, Rock Accent Kit, Birch Logs	Traditional Logs, Beach Accent Kit, Rock Accent Kit, Birch Logs	Traditional Logs, Beach Accent Kit, Rock Accent Kit, Birch Logs	Traditional Logs, Beach Accent Kit, Rock Accent Kit, Birch Logs
Optional Refractory/Panels	Black Glass, Chicago Brick, LedgeStone	Black Glass, Chicago Brick, LedgeStone	Black Glass, Chicago Brick, LedgeStone	Black Glass, Chicago Brick, LedgeStone
Ceramic Glass	Standard	Standard	Standard	Standard
Burner Media (Required)	Reflective Crushed Glass, Lava Rock	Reflective Crushed Glass, Lava Rock	Reflective Crushed Glass, Lava Rock	Reflective Crushed Glass, Lava Rock
Optional Perimeter Media	Reflective Crushed Glass, Lava Rock, Black Sand, Vermiculite, Black Glass Panel	Reflective Crushed Glass, Lava Rock, Black Sand, Vermiculite, Black Glass Panel	Reflective Crushed Glass, Lava Rock, Black Sand, Vermiculite, Black Glass Panel	Reflective Crushed Glass, Lava Rock, Black Sand, Vermiculite, Black Glass Panel
Fan Kit	Optional	Optional	Optional	Optional
Screen Front	Included	Included	Included	Included
Light Kit	Standard	Standard	Standard	Standard
Horizontal Power Vent	Optional	Optional	Optional	Optional
Komfort Zone Kit	Optional	Optional	Required for indoor/ outdoor application	Optional
Vented Cavity	Optional	Optional	Required for indoor/ outdoor application	Optional
Heat Transfer Kits	Optional	Optional	Optional	Optional

Features, Options & Specifications are subject to change.

### Each unit factory tested

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

### Clearances | Without Komfort Zone Kit

Model	Callaway 40	Callaway 50	Callaway See-Thru 'Indoor' Version	Callaway 72
From appliance top stand-off brackets	0"	0"	0"	0"
From appliance left & right stand-off brackets	0"	0"	0"	0"
From appliance back stand-off brackets	0"	0"	N/A	0"
From appliance corners	3"	3"	N/A	1"
From appliance front	36"	36"	36"	36"
Appliance side to adjacent sidewall (No Surround)	0"	3"	0"	6"
Fireplace finishing edge to 3/4" trim	20-3/8"	18"	8"	16-1/2"
Mantle 6" deep from fireplace finishing edge	23-7/8"	21-1/2"	11-1/2"	20"
Mantle 6" deep from fireplace enclosure floor	50-1/2"	48"	38"	48-1/4"
Minimum height of fireplace enclosure	60"	48"	76"	79-1/4"

### Millivolt Option Controls

(Callaway 50 only)



On/Off Remote




Thermostat Remote w/ Timer


### Clearances | With Komfort Zone Kit & Vented Cavity

Model	Callaway 40	Callaway 50	Callaway See-Thru 'Indoor' Version	Callaway 72
Fireplace finishing edge to 3/4" trim	0"	0"	0"	0"
Mantel 6" deep from fireplace finishing edge	0"	0"	3"	0"
Mantel 6" deep from fireplace enclosure floor	26-5/8"	26-1/2"	29-1/2"	28-1/2"

**Callaway 40**

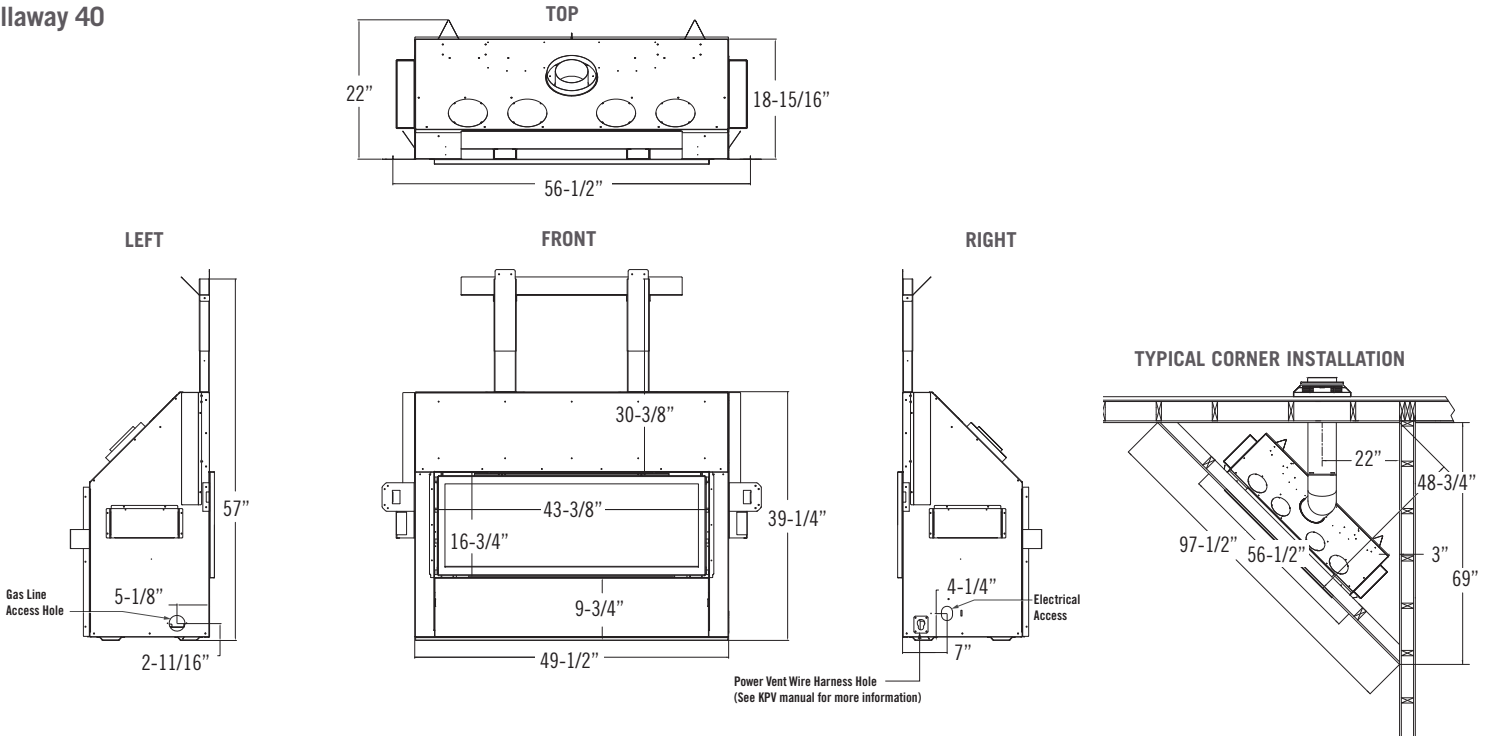


**Callaway 72**

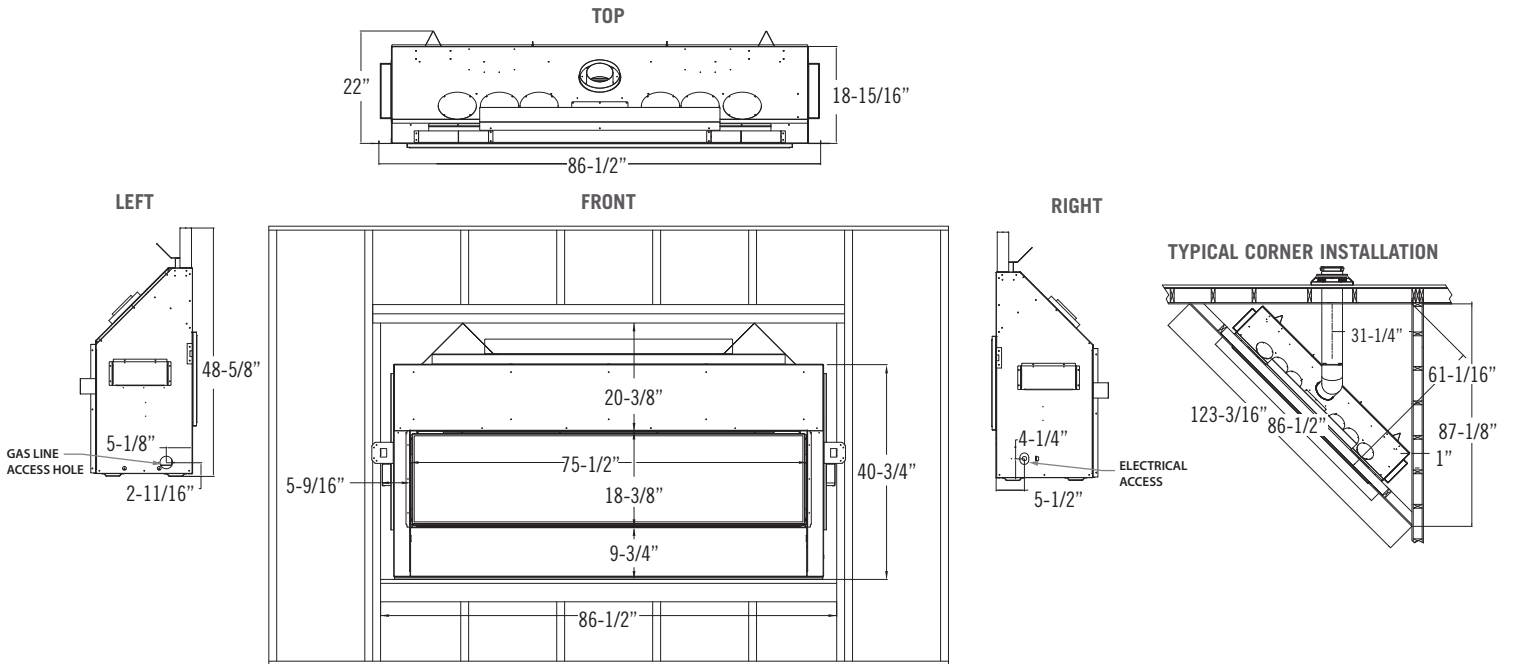


# CALLAWAY SERIES

Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.

## Callaway 50

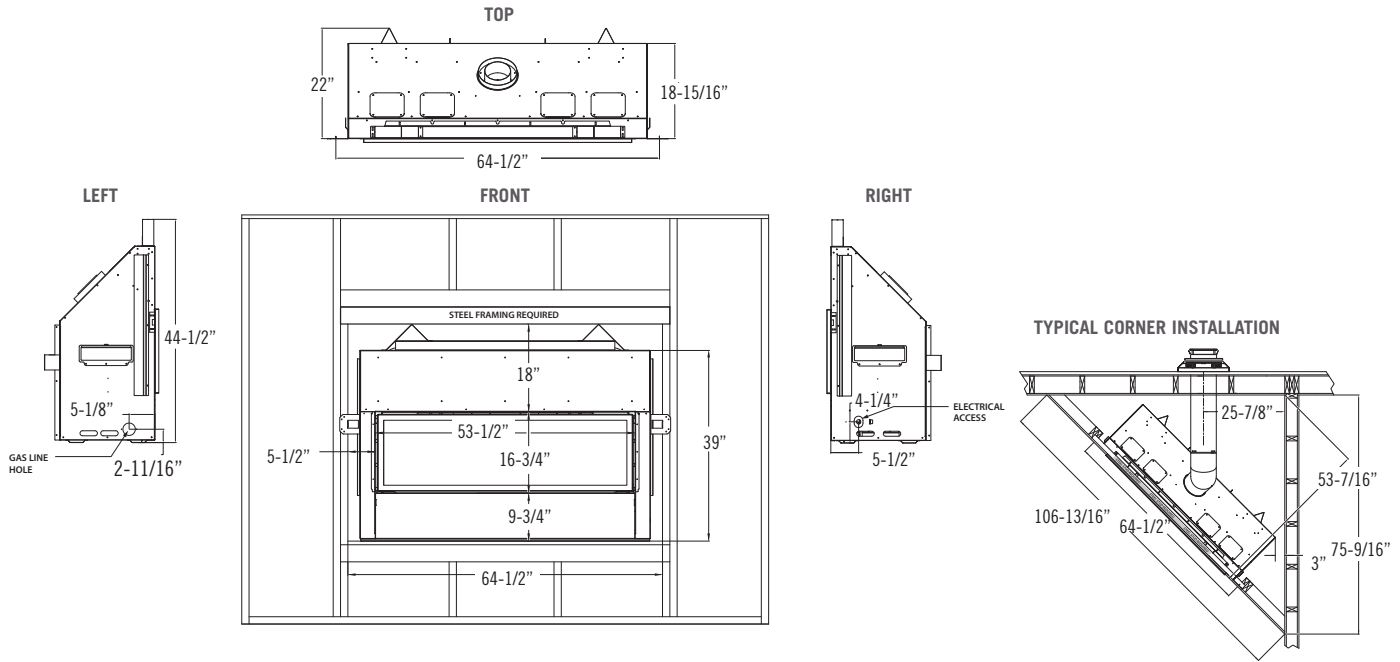

## Callaway See-Thru

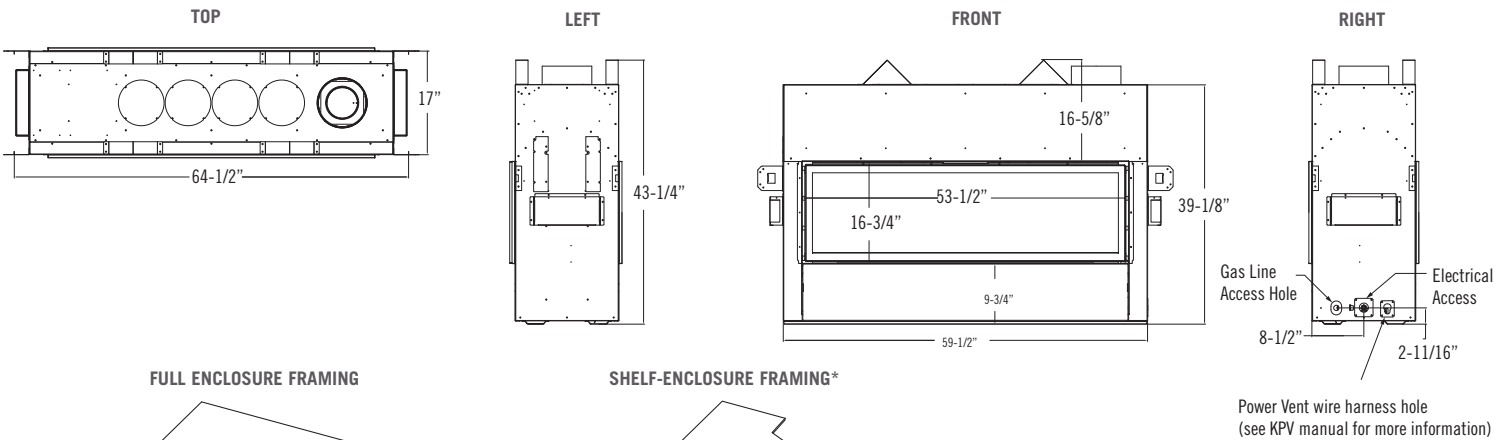

\*The shelf-enclosure framing requires the CWST-SAK shelf application kit – sold separately

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co., Inc.  
 204 Industrial Park Road, Lakefield, MN 56150  
 Phone 1-800-253-4904 www.kozyheat.com

5-22



Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

**WARNING:** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is (are) known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.